



VAN AIR®
A Lincoln Electric Company

CATEGORY 2

Engine Driven Systems
PRO Series • Contractor Series • Viper™ Series • Utility Mount Series




Rugged, Heavy-Duty, and Reliable.

Vanair's line of engine driven systems delivers rugged, heavy duty, and reliable Mobile Power Solutions® to meet our customers' air compressor needs. Offering 20-260 CFM of air, with up to 175 PSI, Vanair's engine driven systems are built to meet the challenges of robust applications, such as pavement breaking, boring, monument engraving, and general air tools. Available with gasoline or diesel engines, and rotary screw or reciprocating air ends, these systems are made to provide the utmost in portability and fuel savings.

PRO 25➤

 **Reciprocating Air Compressor**

Ideal for: General Contractors Where Electricity Isn't An Option!

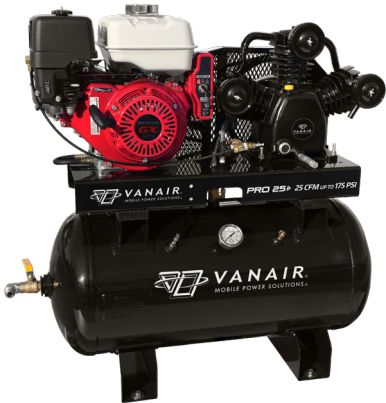

SPECIFICATIONS			
Capacity (CFM)	Maximum Rated Air (PSI)	Air Storage Capacity	Engine Type
25	175	30 Gal. or Skid	8.4 HP Honda® GX270 Electric Start*

PRO 25 Unit Dimensions with Fittings (In.):
45.5L x 17.5W x 41.0H | 30 Gal.
39.9L x 16.2W x 20.9H | Skid
Dry Weight (Lbs.): 186-326 (Depending on Platform)

*Battery not included

PRO 35➤

 **Reciprocating Air Compressor**

Ideal for: Mechanics Trucks and General Contractors!



SPECIFICATIONS			
Capacity (CFM)	Maximum Rated Air (PSI)	Air Storage Capacity	Engine Type
35	175	30 Gal. or Skid	GX390 Honda® Kohler® CH440 Electric Start*

PRO 35 Unit Dimensions with Fittings (In.):
45.9L x 18.9W x 43.4H | 30 Gal.
44.4L x 19.1W x 22.3H | Skid
Dry Weight (Lbs.): 284-420 (Depending on Platform)

*Battery not included

CONTRACTOR➤



Reciprocating Air Compressor & Generator



Ideal for: General Contractors, Roadside Repair, Service Vehicles and Lube/Fuel Trailers!

SPECIFICATIONS	
Engine	Vanair® VNR460VEI, 16 HP or Vanair® VNR680, 20 HP
Compressor Type	Reciprocating
Generator Wattage	5kW Peak, 4.2kW Continuous, AC Power, 60Hz, Single Phase, 120/240V
Maximum Rated PSI	150 PSI (Factory Set @ 125 PSI)
CFM Rating	20 CFM
Air Storage Capacity	10 Gal. (Vanair® VNR460VEI 16 HP Only), 30 Gal., or Skid
Drive System	Dual V-Belt-Driven
Fuel Capacity (Gal.)	1.9 Gal. (Vanair® VNR460VEI 16 HP Only), 11.5 Gal. or Tied to Chassis (Vanair® VNR680 20 HP Only)

Contractor Unit Dimensions (In.):

51L x 21W x 28H | 10 Gal. Vanair® VNR460VEI, 16 HP

51L x 20W x 38H | 30 Gal. Vanair® VNR460VEI, 16 HP

51L x 18W x 22H | Skid Vanair® VNR460VEI, 16 HP

48L x 22W x 42H | 30 Gal Vanair® VNR680, 20 HP

48L x 21W x 25H | Skid Vanair® VNR680, 20 HP

Dry Weight (Lbs.): 304-550 Depending on Platform

VIPER➤ GAS

Small, Quiet, and Enough Fuel to Power Your Workday



Rotary Screw Air Compressor



SPECIFICATIONS					
Model	Capacity (CFM)	Air (PSI)	Engine (RPM)	Engine (HP)	Fuel Capacity
G55	55	175	3600	Honda® 25	10 Gal.
G60	60	150	3600	Honda® 25	10 Gal.
G70	70	125	3600	Honda® 25	10 Gal.
G80	80	100	3600	Honda® 25	10 Gal.

Viper™ Gas Unit Dimensions (In.):

39L x 21W x 30H

40L x 25W x 32H With Fittings

Dry Weight (Lbs.): 440



The Viper™ Series Features ON/OFF Smart Technology for Fuel Savings and Noise Reduction!

VIPER



Rotary Screw Air Compressor

Available with DOT Wheeled Cart and Trailer



Viper Cart Features:

- One Handed Maneuvering
- Zero-Turn
- 8" and 12" Pneumatic Wheels
- 46" L x 31" W x 39" H



VIPER

DIESEL



Rotary Screw Air Compressor



SPECIFICATIONS					
Model	Capacity (CFM)	Air (PSI)	Engine (RPM)	Engine (HP)	Fuel Capacity
D60	60	150	3600	Kubota® 24.8	9 Gal.
D70	70	125**	3600	Kubota® 24.8	9 Gal.
D80	80*	100	3600	Kubota® 24.8	9 Gal.

Viper™ Diesel Unit Dimensions (In.):
48L x 21W x 33H
Dry Weight (Lbs.): 735

*48 CFM at Idle
**100 PSI at altitudes of 3500+ ft.



Powerful Enough to Run a 90lb. Jack Hammer!

V185-UT➤



Utility Mount Air Compressor

Ideal for: Paint Striping, Rail, Sewer Repair, and General Construction!



SPECIFICATIONS

Rated Delivery (CFM)	Rated Operating Pressure (PSI)	Fuel Capacity (Gal.)
185 CFM	100 PSI	30

V185-UT Unit Dimensions (In.):
80L x 35W x 57.36H
Dry Weight (Lbs.): 2340



V210-UT➤



Utility Mount Air Compressor

Ideal for: Paint Striping, Rail, Sewer Repair, and General Construction!

SPECIFICATIONS

Rated Delivery (CFM)	Rated Operating Pressure (PSI)	Fuel Capacity (Gal.)	Auxiliary A-Pad
210 CFM	100/150 PSI	35	25 HP @ 2400 RPM*

V210-UT Unit Dimensions (In.):
80L x 35W x 57.36H
Dry Weight (Lbs.): 2900

* Contact Vanair® for specific requirements



V260-UT➤



Utility Mount Air Compressor

Ideal for: Paint Striping, Rail, Sewer Repair, and General Construction!

SPECIFICATIONS

Rated Delivery (CFM)	Rated Operating Pressure (PSI)	Fuel Capacity (Gal.)	Auxiliary A-Pad
260 CFM	100 PSI	35	25 HP @ 2400 RPM*

V260-UT Unit Dimensions (In.):
83L x 35W x 55.39H
Dry Weight (Lbs.): 3070

* Contact Vanair® for specific requirements



Whatever your challenge, Vanair's line of engine driven systems delivers rugged, heavy duty, reliable and efficient Mobile Power Solutions® to meet your needs.



800.526.8817 | vanair.com   

Vanair® reserves the right to make changes in engineering, design, and specifications, add improvements, or discontinue manufacturing at any time, without notice or obligation. Vanair®, the Vanair® logo and MOBILE POWER SOLUTIONS® are registered trademarks or trademarks of Vanair®, a Lincoln Electric Company, Michigan City, IN, USA. © 2026 All Rights Reserved. 082426_NML

